



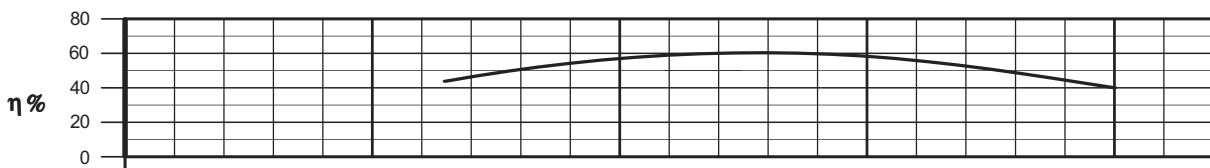


Caratteristiche a 50Hz, 2 poli - Performances at 50Hz, 2 poles - Caractéristiques à 50Hz, 2 pôles

Pompa tipo Pump type Pompe type	Motore Motor Moteur		Monofase Single-phase Monophasé	Trifase Three-phase Triphasé	Portata - Capacity - Débit														
	kW	CV			m ³ /h														
					0	8,4	9,6	10,8	12	13,2	14,4	15,6	16,8	18	19,2	20,4	21,6	22,8	24
4ES24/8	2,2	3			51	41	39	36	34	32	30	26	24	22	20	17	15	13	12
4ES24/11	3	4			70	57	55	51	48	46	43	40	36	33	30	26	24	20	17
4ES24/13	3,7	5			81	67	64	60	57	54	50	46	43	39	36	33	29	25	21
4ES24/15	4	5,5			97	79	76	72	68	64	60	57	53	49	45	41	36	31	26
4ES24/20	5,5	7,5			125	102	99	93	88	83	78	73	69	64	59	54	47	41	36

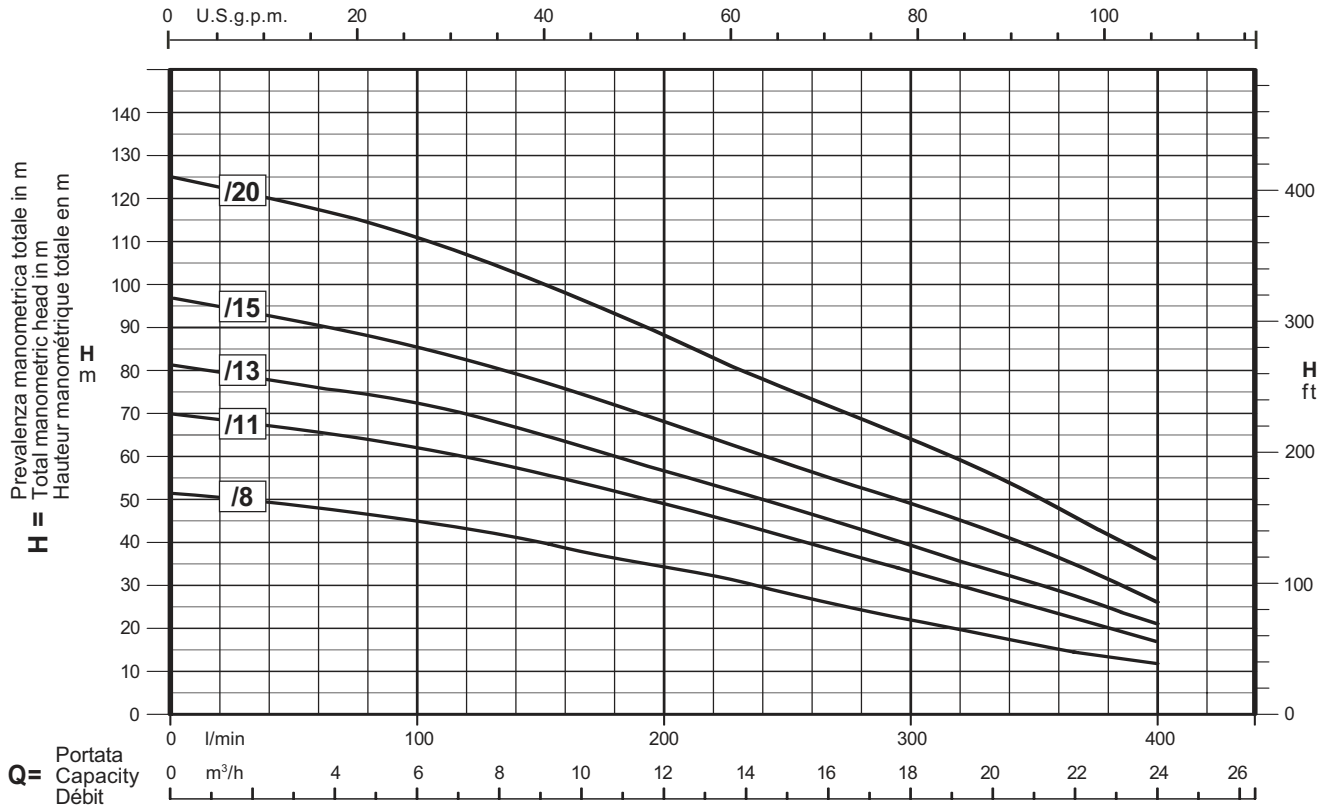

Dimensioni di ingombro in mm e pesi in kg - Overall dimensions in mm and weights in kg - Dimensions en mm et masses en kg



Pompa tipo Pump type Pompe type	A	B	C	Peso Weights Masses
4ES24/8	2"	676	98	6,3
4ES24/11		880	98	8,1
4ES24/13		1013	98	9,3
4ES24/15		1149	98	10,5
4ES24/20		1489	98	13,5

- Dimensioni e pesi relativi al solo corpo pompa
- Dimensions and weights of the single pump body
- Dimensions et masses du seul corps de pompe

Tolleranze secondo le norme ISO 9906 - Annex A - Tolerances according to ISO 9906 - Annex A norms - Tolérances conformes à la norme ISO 9906 - Annex A

η% Rendimento della pompa
Pump efficiency
Rendement de la pompe

Curve per liquidi aventi densità 1000 kg/m³ - viscosità 1 mm²/s alla temperatura di 20°C
Curves established for liquids density 1000 kg/m³ - viscosity 1 mm²/s - temperature 20°C
Courbes établies pour liquides densité 1000 kg/m³ - viscosité 1 mm²/s - température 20°C

Possibili aggiornamenti senza preavviso - Revision possible without prior notice - Mises à jour éventuelles sans préavis