





Caratteristiche a 50Hz, 2 poli - Performances at 50Hz, 2 poles - Caractéristiques à 50Hz, 2 pôles

Pompa tipo Pump type Pompe type	Motore Motor Moteur		Monofase Single-phase Monophasé	Trifase Three-phase Triphasé	Portata - Capacity - Débit														
	kW	CV			m <sup>3</sup> /h														
					0	0,9	1,2	1,5	1,8	2,1	2,4	2,7	3						
4ES3/7	0,37	0,5																	
4ES3/10	0,55	0,75																	
4ES3/14	0,75	1																	
4ES3/20	1,1	1,5																	

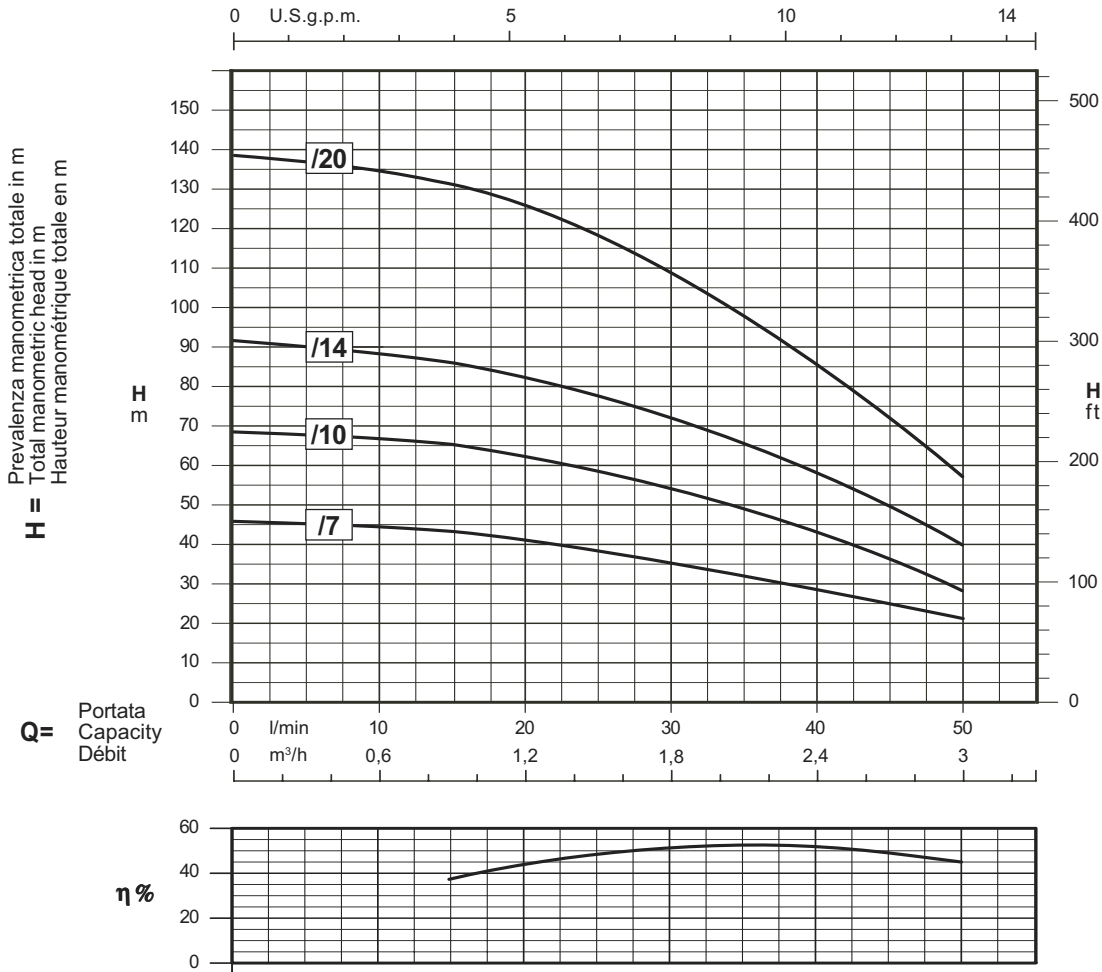

Dimensioni di ingombro in mm e pesi in kg - Overall dimensions in mm and weights in kg - Dimensions en mm et masses en kg



Pompa tipo Pump type Pompe type	A	B	C	Peso Weights Masse
4ES3/7	1 1/4"	271	98	2,8
4ES3/10		324	98	3,3
4ES3/14		394	98	3,9
4ES3/20		499	98	4,9

- Dimensioni e pesi relativi al solo corpo pompa  
- Dimensions and weights of the single pump body  
- Dimensions et masses du seul corps de pompe

Tolleranze secondo le norme ISO 9906 - Annex A - Tolerances according to ISO 9906 - Annex A norms - Tolérances conformes à la norme ISO 9906 - Annex A

η% Rendimento della pompa  
Pump efficiency  
Rendement de la pompe

Curve per liquidi aventi densità 1000 kg/m<sup>3</sup> - viscosità 1 mm<sup>2</sup>/s alla temperatura di 20°C  
Curves established for liquids density 1000 kg/m<sup>3</sup> - viscosity 1 mm<sup>2</sup>/s - temperature 20°C  
Courbes établies pour liquides densité 1000 kg/m<sup>3</sup> - viscosité 1 mm<sup>2</sup>/s - température 20°C

Possibili aggiornamenti senza preavviso - Revision possible without prior notice - Mises à jour éventuelles sans préavis